



Wuhan Vution Lithium Power Technology Co.,Ltd

## Lithium Iron Phosphate (LiFePO4) Battery

**LFP12170 WITH-HE**

**12.8V170AH 2176Wh**

### Features of LiFePO4 Battery

#### Longer Cycle Life

LiFePO4 batteries would be is five times than SLA batteries on cycle life

#### High Power & Light weight

LiFePO4 batteries performance twice power of SLA batteries, while half weight helpful for transport and installation

#### Intelligent management control


Intelligent BMS system covered by LFP batteries to ensure that batteries work on safety and perfect condition

#### Lower Self-discharge rate

Lower Self-discharge rate to guarantee LFP batteries be stored more longer than SLA batteries



### Physical Dimension

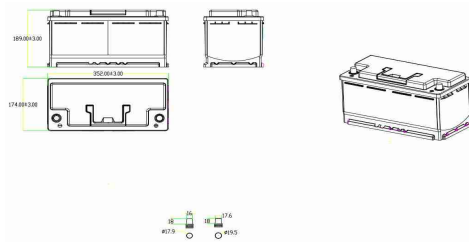

### Applications

- Caravan, RV, camping
- UPS (replacement of SLA batteries)
- Marine, golf cart
- Solar, wind system
- PV ,solar light

### Electrical Characteristics

Chemistry	LiFePO4
Nominal Voltage	12.8V
Nominal Capacity	170Ah (C5,25°C)
Energy	2176Wh
Internal Resistance	≤3 mΩ
Cycle Life	>4000 cycles @1C 80%DOD
Months Self Discharge	<3%
Efficiency of Charge	100% @0.5C
Efficiency of Discharge	96-99% @1C

### Standard Charge

Charge Voltage	14.6±0.2V
Charge Mode	0.2C to 14.6V, then 14.6V,charge current to 0.02C (CC/CV)
Charger Current	85A
Max. Charge Current	150A
Charge Cut-off Voltage	15.6V±0.2V

### Heating Element Specifications

Heating temperature range	-20 °C to 5 °C
Heating power	6A
Heating condition	when charging the battery and the temperature is below 0 °C

### Standard Discharge

Rated Discharge Current	85A
Max Discharge Current	150A
Max. Pulse Current	450A(<3s)
Discharge Cut-off Voltage	10V
Charge Temperature	0 °C to 45 °C (32Fto 113F) @60±25% Relative Humidity
Discharge Temperature	-20 °C to 60 °C (-4F to 140F) @60±25% Relative Humidity
Storage Temperature	0 °C to 40 °C (32Fto 104F) @60±25% Relative Humidity
Water Dust Resistance	IP65

### Mechanical

BMS	4S/4P SMART Bluetooth
Plastic Case	SPCC
Dimensions (in./mm.)	355x175x190 mm
Weight (lbs./kg.)	15kg(33.07bs)
Terminal	SAE




Wuhan Vvution Lithium Power Technology Co.,Ltd

## Lithium Iron Phosphate (LiFePO4) Battery


LFP12170 WITH-HE

12.8V170AH 2176Wh


Different Rate Discharge Curve(25°C)

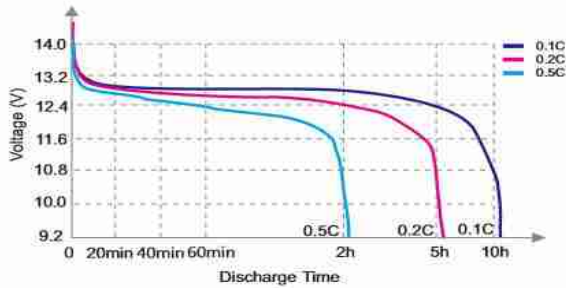


Different Temperature Discharge Curve(0.5C)

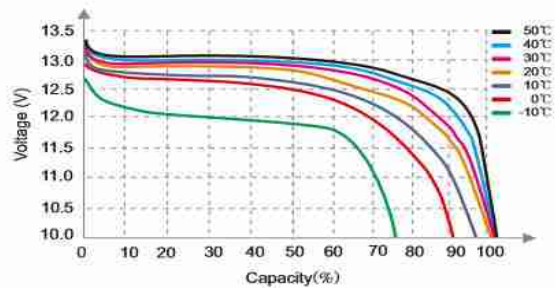


State of Charge Curve(0.5C, 25°C)

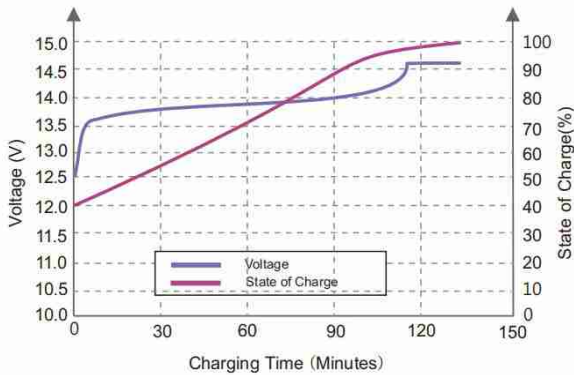


Charging Characteristics(0.5C, 25°C)

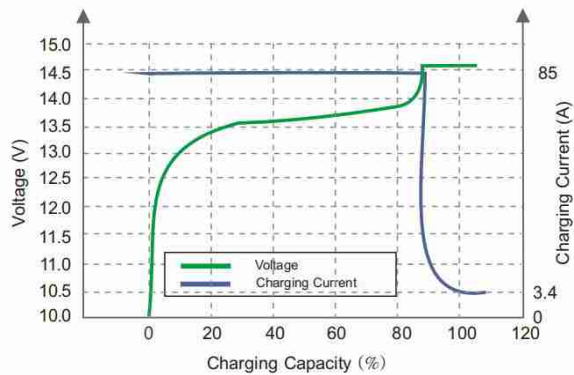

Different DOD Discharge Cycle Life Curve(0.5C)

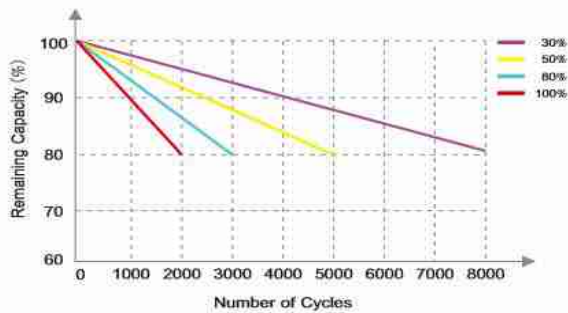

Different Temperature Self Discharge Curve

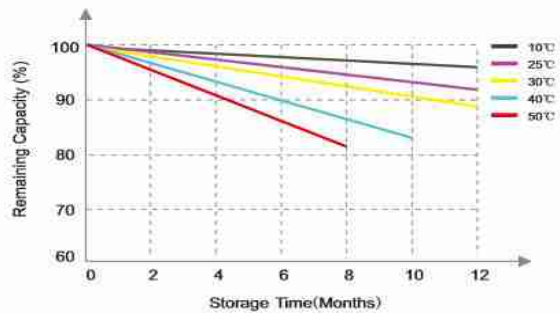

Contact info

[www.vvutionlithium.com](http://www.vvutionlithium.com)

Wuhan Vvution Lithium Power Technology Co.,Ltd



Tel: +86 27 5952 3598  
 Email: [sales15@vvutionlithium.com](mailto:sales15@vvutionlithium.com)  
 Add: 24th Floor, Optics Valley Dingchuang International, Optics Valley Rare Eco Industrial Park, Wuhan, Hubei Province, China

Fax: +86 27 5952 3682  
[www.vvutionlithium.com](http://www.vvutionlithium.com)